MEF EMC-FILTER 3-PHASE 2-STAGE

I:80A U:3x500 VAC book-style

Art.No.: 10556
Weight: 3,600 kg
Country of origin: IT
Model designation: MEF 3/2 80A T

Current: 80 A
2-stage
The MEF 3/1-3/2 3-phase and 1-/2-stage mains suppression filters are used in the 0.1...30 MHz range to suppress conducted interference on mains and supply lines. They are suitable for TN-C networks. The best filter effect is achieved with short connecting lines (recommendation: PE connection < 10 cm) with the largest possible cross sections. Line suppression filters act bidirectionally (in both directions). They reduce symmetrical and asymmetrical interference, which often occurs with frequency converters and switched-mode power supplies.

Link to Product

Illustration

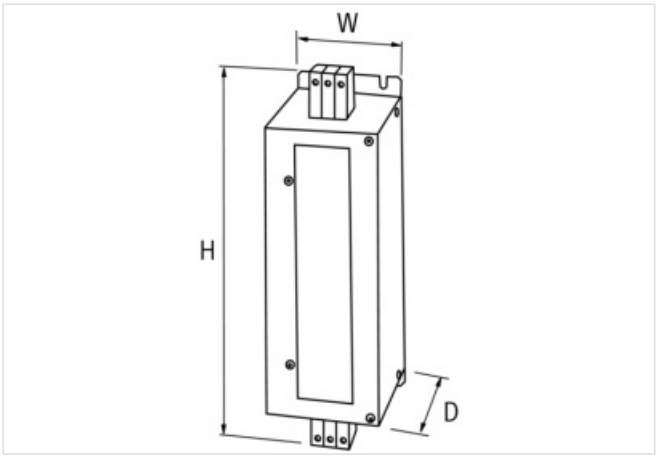

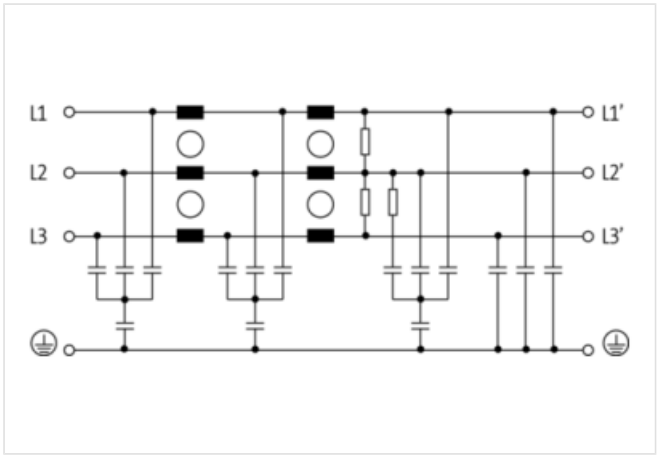

Product may differ from Image

Commercial data

The information in this Product-PDF has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2026-11-15

URL webshop	https://shop.murrelektronik.com/10556
GTIN	4048879029117
EU-Customs tariff number	85363030
US-Customs tariff number	8536308000
ECLASS-6.0	27130806
ECLASS-6.1	27420201
ECLASS-7.0	27420290
ECLASS-7.1	27420290
ECLASS-8.0	27420290
ECLASS-8.1	27420290
ECLASS-9.0	27420290
ECLASS-9.1	27420290
ECLASS-10.0.1	27420290
ECLASS-10.1	27420208
ECLASS-11.0	27420290
ECLASS-11.1	27420208
ECLASS-12.0	27420208
ECLASS-13.0	27420290
ECLASS-14.0	27420290
ETIM-5.0	EC002498
ETIM-6.0	EC002498
ETIM-7.0	EC002498
ETIM-8.0	EC002498
ETIM-9.0	EC002498
ETIM-10.0	EC002498
customs tariff number	85363030
EAN	4048879029117
Packaging unit	1
Electrical data	
Leakage current max.	15 mA @ 250 V AC, 50 Hz
Electrical data | Supply	
Mains frequency	50 ... 60 Hz
Operating voltage AC max.	500 V
Electrical data | Input	
Phase number input	3
Electrical data | Output	
Overload current	18 × (IN t) max. 0.5 ms; 1.5 × (IN t) max. 1 min. (1 × per hour)
Installation	
Connection cross-section solid min.	0.5 mm²
Connection cross-section solid max.	25 mm²
Connection cross-section stranded/fine-stranded min.	0.5 mm²
Connection cross-section stranded/fine-stranded max.	16 mm²
AWG number solid min.	20
AWG number solid max.	3
AWG number stranded/fine stranded min.	20
AWG number stranded/fine stranded max.	5
Device protection | Electrical	
Insulation test voltage L-N	3.3 kV
Insulation test voltage L-L	3.1 kV
Duration insulation test voltage	2 s

The information in this Product-PDF has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2026-11-15

Mechanical data | Mounting data	
Height	295 mm
Width	70 mm
Depth	177 mm
Mounting method	Screwed
Environmental characteristics | Climatic	
Climatic category (EN IEC 60068-1)	25/085/21
Connection type 2-2	
Family construction form	Terminal
No. of poles	3
Gender	Female
Color contact carrier	gray
Connection type	Screw terminals SK
PIN 1	L 1
PIN 2	L 2
PIN 3	L 3
Family construction form	Terminal
No. of poles	3
Gender	Female
Color contact carrier	gray
Connection type	Screw terminals SK
PIN 1	L 1'
PIN 2	L 2'
PIN 3	L 3'

The information in this Product-PDF has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2026-11-15