

## **MPOT POTENTIOMETER MODULE**

5K-Ohm/270 degree

270° potentiometer

 $5 k\Omega$ 


The 10-turn potentiometer has a decimal scale and locking lever


The potentiometer modules are fitted with standard values. They are available as 270° potentiometer and as 10-turn potentiometer with fine adjustment. They can be operated with 10 V DC or 24 V DC. A resistor reduces the voltage so that a 24 V DC voltage can be reduced to operate between approx. 0...11 V. The connection is via terminals.

## **Link to Product**

## Illustration



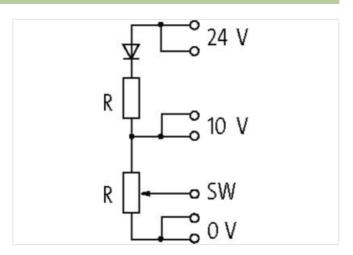



Product may differ from Image

Commercial data		
ECLASS-6.0	27371227	
ECLASS-6.1	27371227	
ECLASS-7.0	27371227	
ECLASS-8.0	27371227	
ECLASS-9.0	27371227	
ECLASS-10.1	27371227	
ECLASS-11.1	27371227	
ECLASS-12.0	27371227	
ETIM-5.0	EC001027	

The information in this Product-PDF has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2024-04-24



stay connected

customs tariff number	85334010	
GTIN	4048879041669	
Packaging unit	1	
Electrical data		
Power max.	1 W	
Linearity	±3 %	
Resistance	5 kΩ	
Resistance tolerance	20 %	
Electrical data   Input		
Power loss max.	0,25 W	
Mechanical data   Mounting data		
Mounting method	geschnappt	
Suitable for mounting type	mounting rail, (EN 60715)	
Height	75 mm	
Width	45 mm	
Depth	65 mm	
Environmental characteristics   Climatic		
Operating temperature min.	0 ℃	
Operating temperature max.	60 °C	