
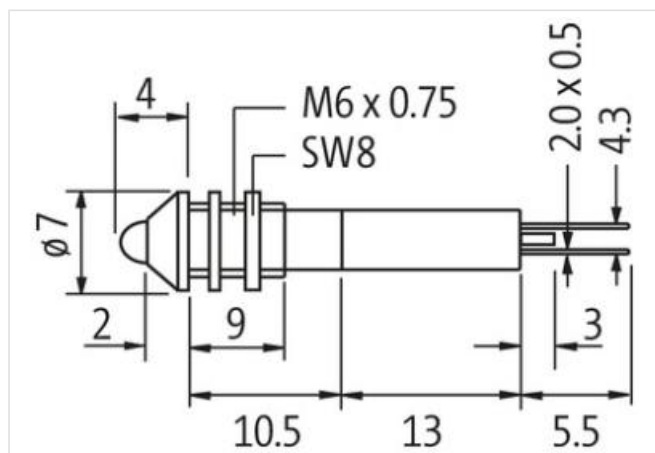


LED 3mm - 24V DC - IP40

Link to Product

A red, cylindrical, high-voltage electrical component, likely a spark plug or spark gap, with a hexagonal base and two gold-colored terminals. The component is shown at an angle, highlighting its cylindrical body and the hexagonal mounting base. The red body has some faint, illegible markings. The hexagonal base is made of a polished metal, and the two gold-colored terminals are visible at the top.

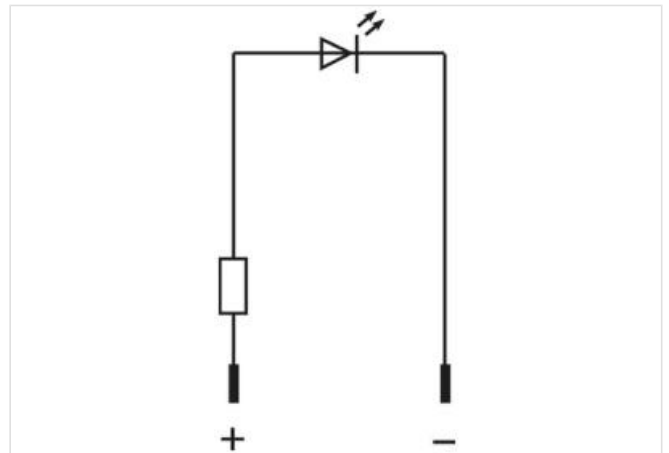

Commercial data

ECLASS-6.0	27261590
ECLASS-6.1	27261501
ECLASS-7.0	27261501
ECLASS-8.0	27261501
ECLASS-9.0	27261501
ECLASS-10.1	27261501
ECLASS-11.1	27261501
ECLASS-12.0	27261501
ETIM-5.0	EC000272
customs tariff number	85318070
GTIN	4048879041089
Packaging unit	10

Electrical data | Supply

Operating voltage DC	24 V
Operating voltage DC min.	20,4 V
Operating voltage DC max.	26,4 V
Current consumption max.	0,6 mA

Installation | Connection

Connection information	Faston 2.0×0.5 mm
------------------------	-------------------

Mechanical data | Material data

Coating housing	chrome-plated
Material housing	Brass

Mechanical data | Mounting data

Height	7 mm
Width	7 mm
Depth	33 mm

Environmental characteristics | Climatic

Operating temperature min.	-40 °C
Operating temperature max.	70 °C