



IN: 230/400+/-15VAC OUT: :24V/20ADC

**Link to Product**



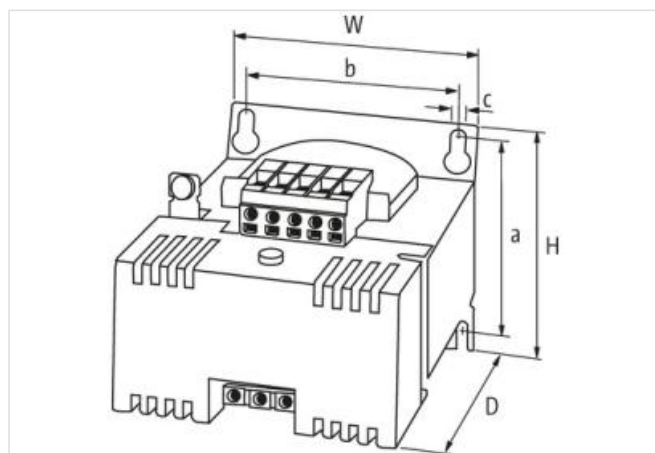

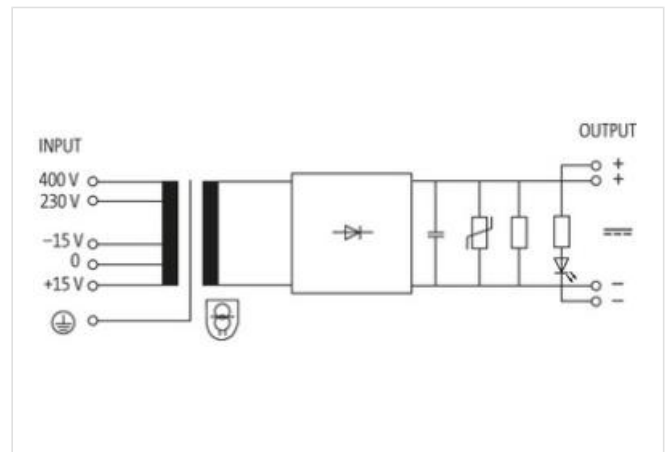

|             |          |
|-------------|----------|
| ECLASS-6.0  | 27049002 |
| ECLASS-6.1  | 27049002 |
| ECLASS-7.0  | 27049002 |
| ECLASS-8.0  | 27049002 |
| ECLASS-9.0  | 27040701 |
| ECLASS-10.1 | 27040701 |
| ECLASS-11.1 | 27040701 |
| ECLASS-12.0 | 27040701 |

The information in this Product-PDF has been compiled with the utmost care.  
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2024-05-03

Murrelektronik GmbH | Falkenstraße 3 | 71570 Oppenweiler | Fon +49 (71 91) 47-0 | Fax +49 (71 91) 47-491000 | [shop@murrelektronik.de](mailto:shop@murrelektronik.de) | [shop.murrelektronik.de](http://shop.murrelektronik.de)

|                       |               |
|-----------------------|---------------|
| ETIM-5.0              | EC002540      |
| customs tariff number | 85044095      |
| GTIN                  | 4048879080033 |
| Packaging unit        | 1             |

**Electrical data**

|                |      |
|----------------|------|
| Security level | SELV |
|----------------|------|

**Electrical data | Supply**

|                 |              |
|-----------------|--------------|
| Power frequency | 50 ... 60 Hz |
|-----------------|--------------|

**Electrical data | Input**

|                                         |                  |
|-----------------------------------------|------------------|
| Fuse protection 1 primary side external | 5 A @230 V AC    |
| Fuse protection 2 primary side external | 3,15 A @400 V AC |
| Characteristic back-up fuse             | Inertia          |
| Input voltage 1 AC                      | 230 V            |
| Input voltage 1 AC min.                 | 195,5 V          |
| Input voltage 1 AC max.                 | 264,5 V          |
| Input voltage 2 AC                      | 400 V            |
| Input voltage 2 AC min.                 | 340 V            |
| Input voltage 2 AC max.                 | 460 V            |
| Input current at input voltage 1 AC     | 3,7 A            |
| Input current at input voltage 2 AC     | 2,15 A           |

**Electrical data | Output**

|                           |                               |
|---------------------------|-------------------------------|
| Output suppression        | LED, Screening capacitor, VDR |
| Output voltage DC         | 24 V                          |
| Output voltage adjustable | no                            |
| Output current max.       | 24 A                          |
| Ripple max.               | 5 %                           |

**Mechanical data | Mounting data**

|                            |                        |
|----------------------------|------------------------|
| Suitable for mounting type | Schlüssellochauhängung |
| Mounting dimension a       | 102 mm                 |
| Mounting dimension b       | 135 mm                 |
| Mounting dimension c       | 7 mm                   |
| Height                     | 127 mm                 |
| Width                      | 174 mm                 |
| Depth                      | 213,5 mm               |

**Environmental characteristics | Climatic**

|                            |        |
|----------------------------|--------|
| Operating temperature min. | -20 °C |
| Operating temperature max. | 60 °C  |
| Derating from              | 40 °C  |

**Conformity**

|     |            |
|-----|------------|
| EMC | EN 55011 A |
|-----|------------|

**Connection type 3**

|                          |                    |
|--------------------------|--------------------|
| Connection               | Screw terminals SK |
| Family construction form | terminal           |
| Gender                   | female             |
| Color contact carrier    | metallic           |
| No. of poles             | 1                  |
| PIN 1                    | PE                 |
| Connection               | Screw terminals SK |
| Family construction form | terminal           |
| Gender                   | female             |
| Color contact carrier    | green              |

|                          |                    |
|--------------------------|--------------------|
| No. of poles             | 4                  |
| PIN 1                    | +                  |
| PIN 2                    | +                  |
| PIN 3                    | -                  |
| PIN 4                    | -                  |
| Connection               | Screw terminals SK |
| Family construction form | terminal           |
| Gender                   | female             |
| Color contact carrier    | green              |
| No. of poles             | 5                  |
| PIN 1                    | + 15 V             |
| PIN 3                    | - 15 V             |
| PIN 4                    | 230 V              |
| PIN 5                    | 400 V              |