

M12-DISTRIBUTOR BOX 6-WAY, 5-POLE WITHOUT LED

MVC6-UQR5.0-XA 5m PUR-CNOMO-cable 12x0,34/3x1


6-way, 5-pole
PUR/PVC (CNOMO)
5.0 m
without LED
Further cable lengths on request.

Link to Product

Illustration



Product may differ from Image

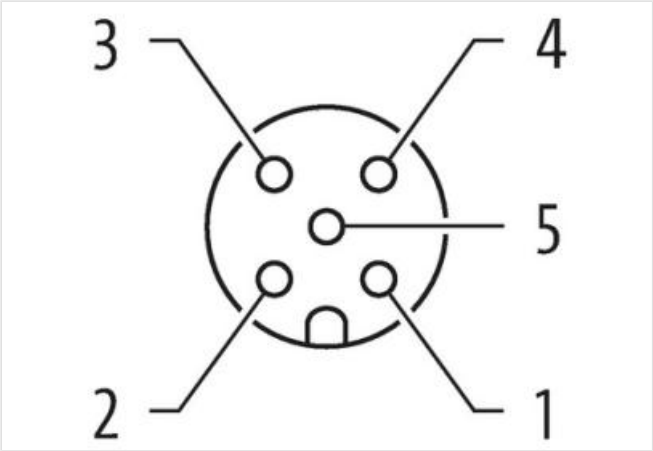

Electrical data Supply	
Operating voltage DC	24 V
Current operating per contact max.	4 A
Total current max.	10 A
Industrial communication	
Number of signals per port	2
Installation Connection	
Mounting set	M12 x 1
Device protection Electrical	
Degree of protection (EN IEC 60529)	IP67
Additional condition protection degree	inserted, screwed
Mechanical data Mounting data	
Mounting method	Schraubgewinde
Height	117 mm
Width	54 mm
Depth	33 mm
Environmental characteristics Climatic	
Operating temperature min.	-20 °C
Operating temperature max.	80 °C
Connection type 2	
Family construction form	free cable end
No. of poles	21
Family construction form	M12

Gender	female
Color contact carrier	black
Coding	A
No. of poles	5
PIN 1	+
PIN 2	NC S 2
PIN 3	-
PIN 4	NO S 1
PIN 5	PE

Commercial data

customs tariff number	85444290
GTIN	4048879060608
Packaging unit	1