

## EUROCARD HOLDER

SKP 64/2-C(a+c)-FK

Spring clamp terminals  
64-pole C (EN 60603)  
Row a, c  
250 V AC



With the vertical snap adapter SASA 135 Art.-No. 63900 the holder can be mounted at right-angles on the rail.

The D2 size is for a card without a front plate.

To insert the card first press down the 2 yellow buttons. Then slide the Eurocard into the guide slots pushing until fully engaged. The card is now locked into position. It can be removed by pressing down on the 2 yellow buttons.

### [Link to Product](#)

#### Illustration

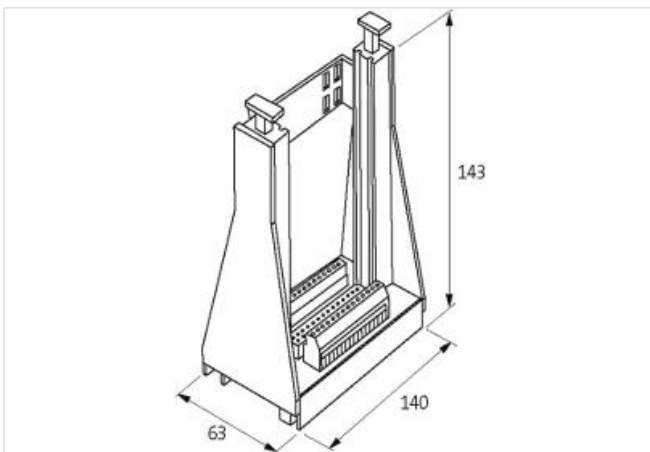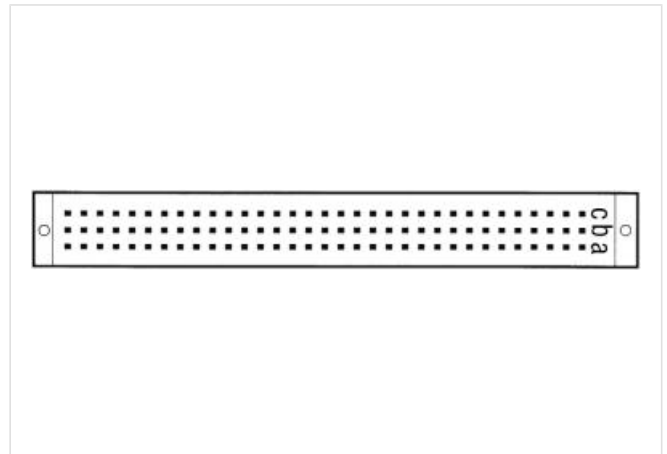

Product may differ from Image



#### Commercial data

|            |          |
|------------|----------|
| ECLASS-6.0 | 27260710 |
| ECLASS-6.1 | 27260704 |

|                       |               |
|-----------------------|---------------|
| ECLASS-7.0            | 27440402      |
| ECLASS-8.0            | 27440402      |
| ECLASS-9.0            | 27440402      |
| ECLASS-10.1           | 27440402      |
| ECLASS-11.1           | 27460201      |
| ECLASS-12.0           | 27460201      |
| ETIM-5.0              | EC002780      |
| customs tariff number | 85366990      |
| GTIN                  | 4048879038652 |
| Packaging unit        | 1             |

#### Electrical data | Supply

|                        |       |
|------------------------|-------|
| Operating voltage AC   | 250 V |
| Operating current max. | 2 A   |

#### Installation

|                                     |                   |
|-------------------------------------|-------------------|
| Connection cross-section solid max. | 4 mm <sup>2</sup> |
|-------------------------------------|-------------------|

#### Installation | Pin assignment

|              |    |
|--------------|----|
| No. of poles | 64 |
|--------------|----|

#### Device protection | Electrical

|                                   |   |
|-----------------------------------|---|
| Overvoltage category (EN 60664-1) | I |
|-----------------------------------|---|

#### Device protection | Media

|                  |                 |
|------------------|-----------------|
| Flame resistance | flame retardant |
|------------------|-----------------|

#### Mechanical data

|                          |              |
|--------------------------|--------------|
| Type of socket connector | C (EN 60603) |
|--------------------------|--------------|

#### Mechanical data | Material data

|                  |         |
|------------------|---------|
| Material housing | Plastic |
|------------------|---------|

#### Mechanical data | Mounting data

|                            |                           |
|----------------------------|---------------------------|
| Mounting method            | screwed, geschnappt       |
| Suitable for mounting type | mounting rail, (EN 60715) |
| Height                     | 63 mm                     |
| Width                      | 137 mm                    |
| Depth                      | 170 mm                    |