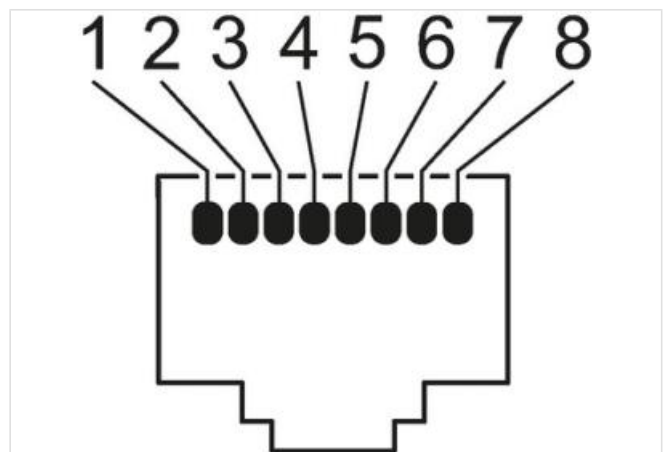
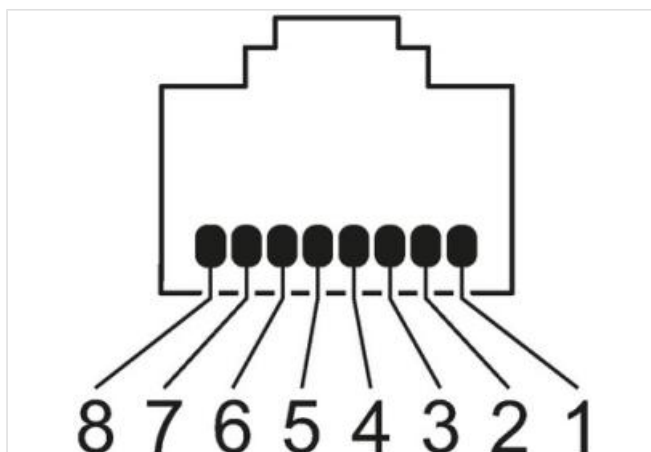
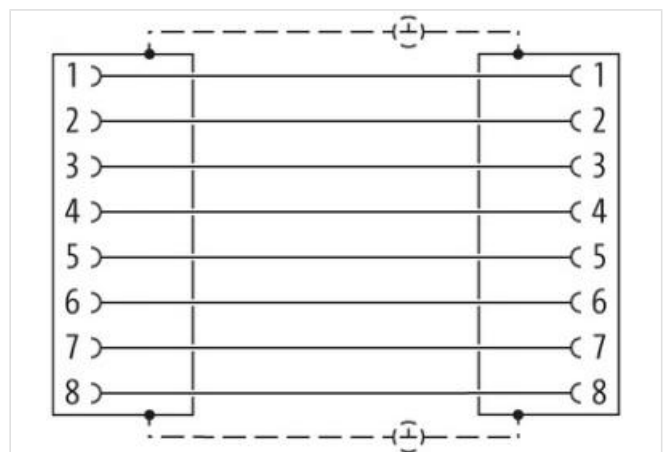
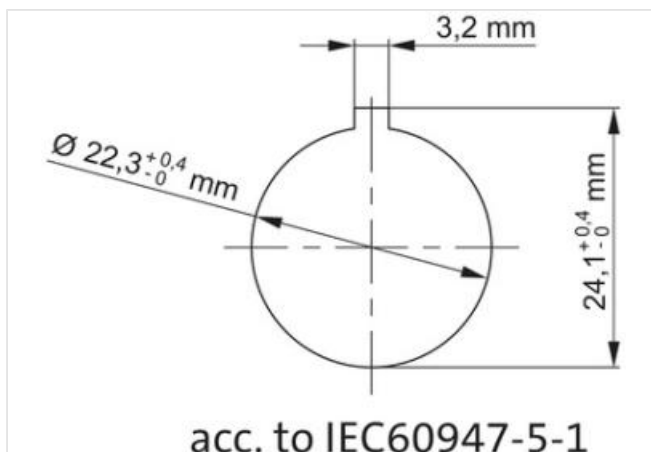
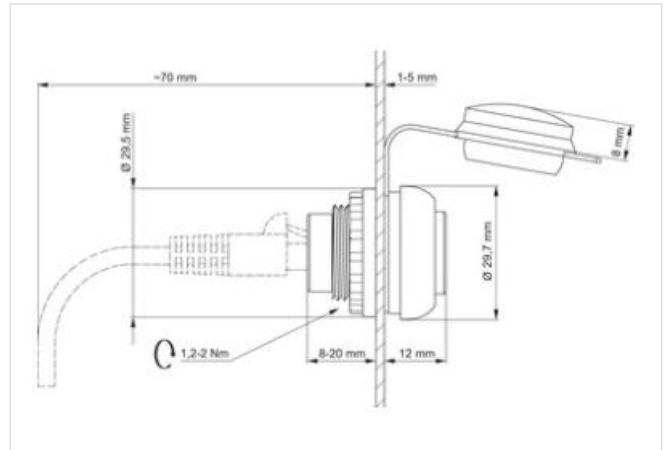


**MSDD pass-through RJ45 CAT5e femal/femal, design silver**

Pass-through

1 × RJ45, 8-pole CAT5e (female/female)

[Link to Product](#)
**Illustration**


Product may differ from Image



#### Commercial data

|                       |               |
|-----------------------|---------------|
| ECLASS-6.0            | 27143423      |
| ECLASS-6.1            | 27143419      |
| ECLASS-7.0            | 27440515      |
| ECLASS-8.0            | 27440515      |
| ECLASS-9.0            | 27440515      |
| ECLASS-10.1           | 27440515      |
| ECLASS-11.1           | 27440515      |
| ECLASS-12.0           | 27440515      |
| ETIM-5.0              | EC002625      |
| customs tariff number | 85366990      |
| GTIN                  | 4048879031189 |
| Packaging unit        | 1             |

#### Electrical data | Supply

|                        |       |
|------------------------|-------|
| Operating voltage AC   | 24 V  |
| Operating voltage DC   | 24 V  |
| Operating current max. | 1,5 A |

#### Installation | Connection

|                          |        |
|--------------------------|--------|
| Family construction form | RJ47   |
| Gender                   | female |
| Gender Rear              | female |
| Cable category min.      | Cat5e  |

#### Device protection

|          |     |
|----------|-----|
| Shielded | yes |
|----------|-----|

#### Device protection | Electrical

|                                        |                           |
|----------------------------------------|---------------------------|
| Degree of protection (EN IEC 60529)    | IP20, IP65                |
| Protection NEMA                        | 2, 3R, 4, 12, 13, 4x      |
| Additional condition protection degree | inserted, in closed state |

#### Device protection | Mechanical

|                      |            |
|----------------------|------------|
| Mechanical endurance | 750 Cycles |
|----------------------|------------|

#### Mechanical data | Mounting data

|                 |         |
|-----------------|---------|
| Diameter cutout | 22,5 mm |
| Diameter        | 29,5 mm |
| Mounting depth  | 70 mm   |
| Depth           | 20 mm   |

#### Approvals

|        |     |
|--------|-----|
| UL 50E | yes |
|--------|-----|