

Bus terminating plug M12 male B-cod. F&B

CUBE67 HD

Cube67

Terminating resistor

Male

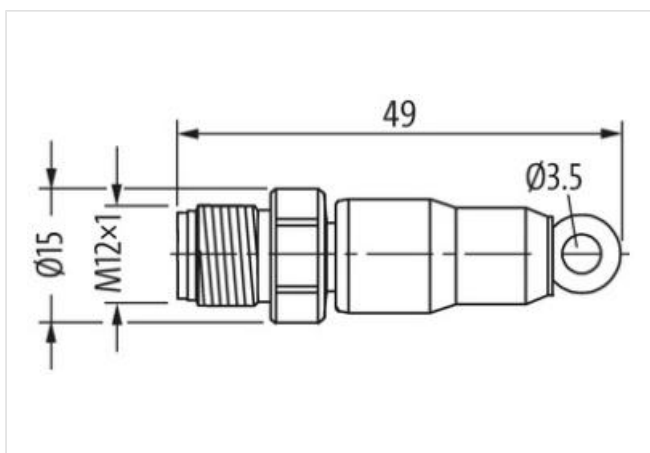
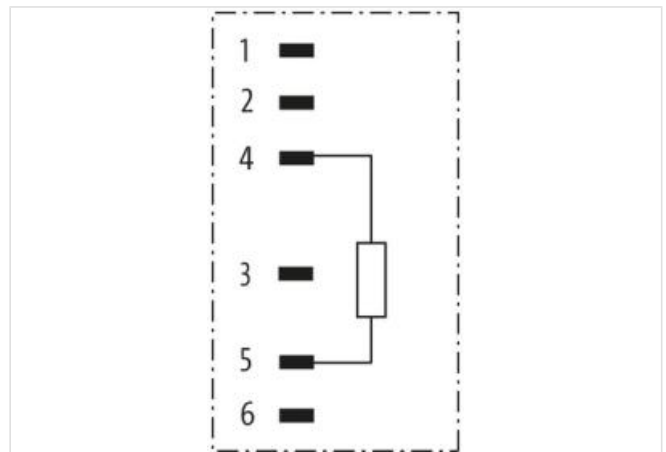
M12, 6-pole

A-coded

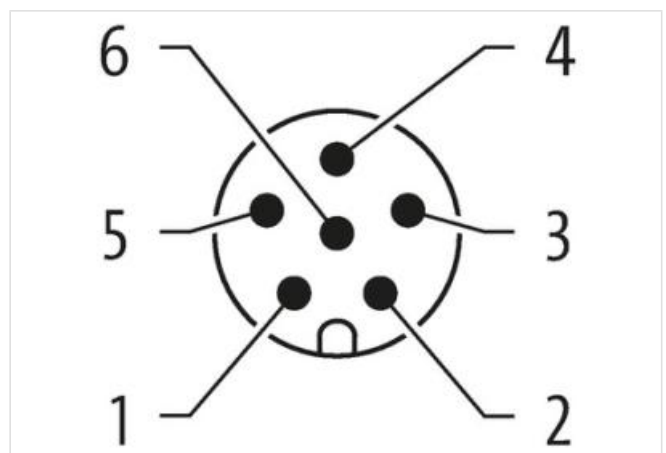
Stainless steel 1.4404 (V4A)

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

[Link to Product](#)**Illustration**

Product may differ from Image

**Side 1**

Family construction form

M12

Coding

A

| | |
|---|---------------------------------------|
| Material contact | Copper alloy |
| No. of poles | 6 |
| Width across flats | SW14 |
| Degree of protection (EN IEC 60529) | IP67 |
| Commercial data | |
| ECLASS-6.0 | 19070403 |
| ECLASS-6.1 | 27260702 |
| ECLASS-7.0 | 27440390 |
| ECLASS-8.0 | 27440190 |
| ECLASS-9.0 | 27440190 |
| ECLASS-10.1 | 27440190 |
| ECLASS-11.1 | 27440190 |
| ECLASS-12.0 | 27440190 |
| ETIM-5.0 | EC000830 |
| customs tariff number | 85332100 |
| GTIN | 4048879706919 |
| Packaging unit | 1 |
| Electrical data Supply | |
| Operating voltage DC max. | 30 V |
| Operating voltage DC max. (UL-listed) | 30 V |
| Current operating per contact max. | 4 A |
| Diagnostics | |
| Status indication LED | no |
| Installation Connection | |
| Tightening torque | 0,6 Nm |
| Mounting set | M12 x 1 |
| Device protection Electrical | |
| Additional condition protection degree | inserted, screwed |
| Pollution Degree | 3 |
| Rated surge voltage | 0,8 kV |
| Material group (IEC 60664-1) | I |
| Mechanical data Material data | |
| Coating contact | gold plated |
| Material housing | PUR |
| Locking material | Stainless steel 1.4404 (V4A) |
| Mechanical data Mounting data | |
| Mounting method | inserted, screwed, Shaking protection |
| Environmental characteristics Climatic | |
| Operating temperature min. | -25 °C |
| Operating temperature max. | 85 °C |