

B10 Surface mounted h., high profile, IP65

Single locking lever m., side entry M25, p-cover


B10  
Surface mounted housing (high)  
Single locking lever  
IP65  
Technical data will be only guaranteed with Murrelektronik components.

Link to Product

Illustration



Product may differ from Image

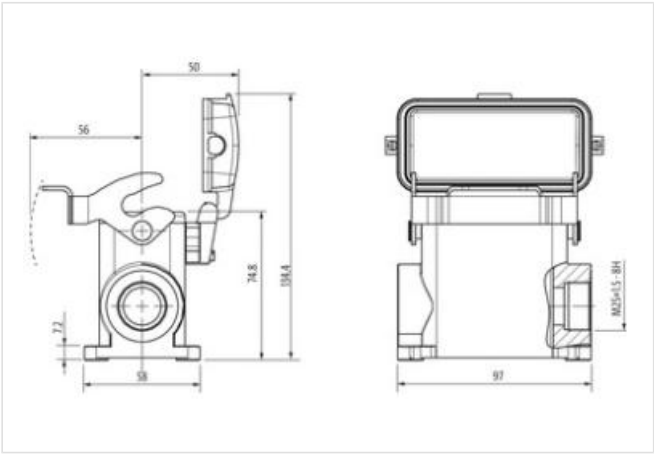

Commercial data

|                       |               |
|-----------------------|---------------|
| ECLASS-6.0            | 27143424      |
| ECLASS-6.1            | 27261203      |
| ECLASS-7.0            | 27440202      |
| ECLASS-8.0            | 27440202      |
| ECLASS-9.0            | 27440202      |
| ECLASS-10.1           | 27440202      |
| ECLASS-11.1           | 27440202      |
| ECLASS-12.0           | 27440202      |
| ETIM-5.0              | EC000437      |
| customs tariff number | 85389099      |
| GTIN                  | 4048879646260 |
| Packaging unit        | 1             |

Installation

Cable outlet laterally

Installation | Connection

|                    |     |
|--------------------|-----|
| Mounting set       | M25 |
| Mating cycles min. | 500 |

Device protection | Electrical

|                                        |                                         |
|----------------------------------------|-----------------------------------------|
| Degree of protection (EN IEC 60529)    | IP65                                    |
| Additional condition protection degree | inserted, locked, with screw connection |

Mechanical data

Housing type Surface mounted housing

Mechanical data | Material data

|                           |                      |
|---------------------------|----------------------|
| Coating housing           | powder-coated        |
| Coating locking           | verzinkt             |
| Material gasket           | NBR                  |
| Material housing          | Aluminum die casting |
| Material protective cover | Plastic              |
| Locking material          | Steel                |

**Mechanical data | Mounting data**

|                    |                      |
|--------------------|----------------------|
| Size               | B10                  |
| Height             | 74,8 mm              |
| Width              | 58 mm                |
| Depth              | 97 mm                |
| Looking techniques | Single locking lever |

**Environmental characteristics | Climatic**

|                                    |           |
|------------------------------------|-----------|
| Operating temperature min.         | -40 °C    |
| Operating temperature max.         | 100 °C    |
| Climatic category (EN IEC 60068-1) | 40/100/21 |