

B10 Surface mounted h., high profile, IP65

Single locking lever m.,2 entries M25, p-cover


B10  
Surface mounted housing (high)  
Single locking lever  
IP65  
Technical data will be only guaranteed with Murrelektronik components.

Link to Product

Illustration



Product may differ from Image

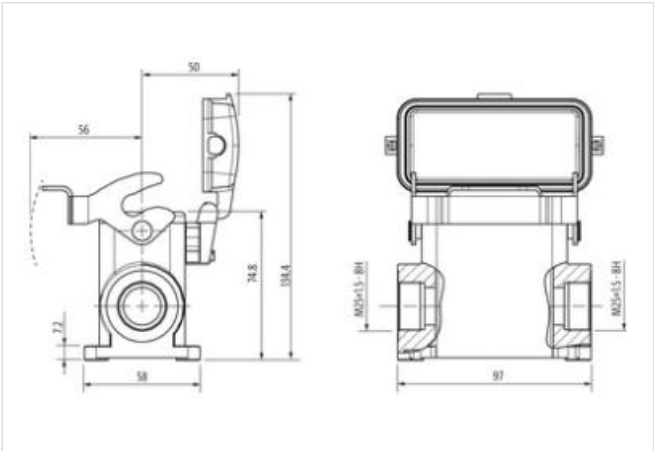

Commercial data

|                       |               |
|-----------------------|---------------|
| ECLASS-6.0            | 27143424      |
| ECLASS-6.1            | 27261203      |
| ECLASS-7.0            | 27440202      |
| ECLASS-8.0            | 27440202      |
| ECLASS-9.0            | 27440202      |
| ECLASS-10.1           | 27440202      |
| ECLASS-11.1           | 27440202      |
| ECLASS-12.0           | 27440202      |
| ETIM-5.0              | EC000437      |
| customs tariff number | 85389099      |
| GTIN                  | 4048879646277 |
| Packaging unit        | 1             |

Installation

|              |              |
|--------------|--------------|
| Cable outlet | double-sided |
|--------------|--------------|

Installation | Connection

|                    |     |
|--------------------|-----|
| Mounting set       | M25 |
| Mating cycles min. | 500 |

Device protection | Electrical

|                                        |                                         |
|----------------------------------------|-----------------------------------------|
| Degree of protection (EN IEC 60529)    | IP65                                    |
| Additional condition protection degree | inserted, locked, with screw connection |

Mechanical data

|              |                         |
|--------------|-------------------------|
| Housing type | Surface mounted housing |
|--------------|-------------------------|

Mechanical data | Material data

|                 |               |
|-----------------|---------------|
| Coating housing | powder-coated |
|-----------------|---------------|

|                 |          |
|-----------------|----------|
| Coating locking | verzinkt |
|-----------------|----------|

|                 |     |
|-----------------|-----|
| Material gasket | NBR |
|-----------------|-----|

|                  |                      |
|------------------|----------------------|
| Material housing | Aluminum die casting |
|------------------|----------------------|

|                           |         |
|---------------------------|---------|
| Material protective cover | Plastic |
|---------------------------|---------|

|                  |       |
|------------------|-------|
| Locking material | Steel |
|------------------|-------|

**Mechanical data | Mounting data**

|      |     |
|------|-----|
| Size | B10 |
|------|-----|

|        |         |
|--------|---------|
| Height | 74,8 mm |
|--------|---------|

|       |       |
|-------|-------|
| Width | 58 mm |
|-------|-------|

|       |       |
|-------|-------|
| Depth | 97 mm |
|-------|-------|

|                    |                      |
|--------------------|----------------------|
| Looking techniques | Single locking lever |
|--------------------|----------------------|

**Environmental characteristics | Climatic**

|                            |        |
|----------------------------|--------|
| Operating temperature min. | -40 °C |
|----------------------------|--------|

|                            |        |
|----------------------------|--------|
| Operating temperature max. | 100 °C |
|----------------------------|--------|

|                                    |           |
|------------------------------------|-----------|
| Climatic category (EN IEC 60068-1) | 40/100/21 |
|------------------------------------|-----------|