



SVS Eco valve plug CI-9.4mm screw terminal

2-pol. + PE, max. 0,5mm², 4 -6mm, LED+VDR 110V

Form CI (9.4 mm)  
110 V AC/DC ±10%  
LED and VDR  
metric  
Field wireable (screw terminals)  
Plastic housings with good resistance against chemicals and oils.  
The resistance to aggressive media should be individually tested for your application. Further details on request.

Link to Product

Illustration

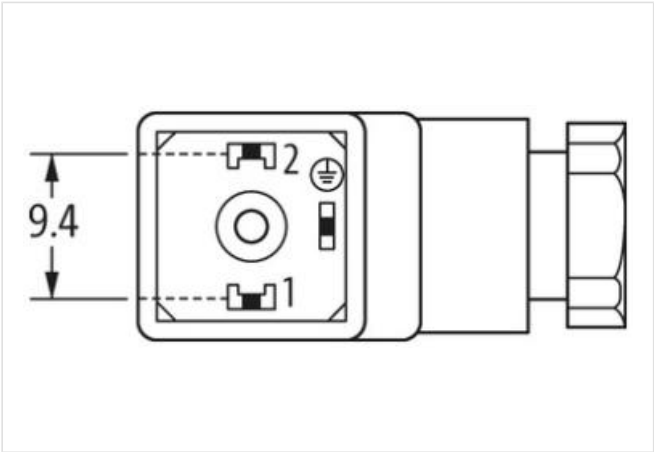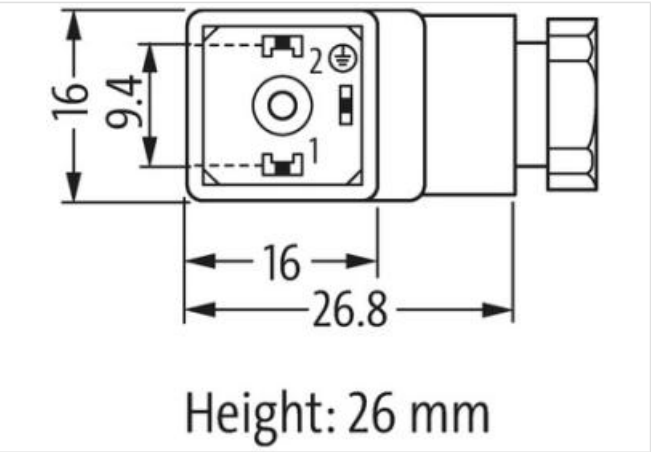

Product may differ from Image

Side 1	
Mounting method	inserted, screwed
Degree of protection (EN IEC 60529)	IP65
Commercial data	
ECLASS-6.0	27279221
ECLASS-7.0	27440104
ECLASS-8.0	27440104
ECLASS-9.0	27440102

ETIM-5.0	EC002062
customs tariff number	85366990
GTIN	4048879186957
Packaging unit	1

**Electrical data | Supply**

Operating voltage AC	110 V
Operating voltage AC min.	99 V
Operating voltage AC max.	121 V
Operating voltage DC	110 V
Operating voltage DC min.	99 V
Operating voltage DC max.	121 V
Current operating per contact max.	1,5 A

**Diagnostics**

Status indication LED	yellow
-----------------------	--------

**Installation**

Connection cross section max.	0,5 mm <sup>2</sup>
-------------------------------	---------------------

**Installation | Connection**

Tightening torque	0,4 Nm
Tightening torque clamping screw	0,2 Nm
Mounting set	M12 x 1.5

**Installation | Pin assignment**

No. of poles	2 + PE
--------------	--------

**Device protection | Electrical**

Additional condition protection degree	inserted, screwed
Additional suppressor	Varistor

**Mechanical data | Material data**

Color housing	transparent
Material gasket	NBR
Material housing	PA

**Mechanical data | Mounting data**

fastening screw	M3
Clamping range min.	4 mm
Clamping range max.	6 mm

**Environmental characteristics | Climatic**

Operating temperature min.	-40 °C
Operating temperature max.	60 °C