

**M8 panel feed through male / female 0° A-cod.**

4-pol., shielded

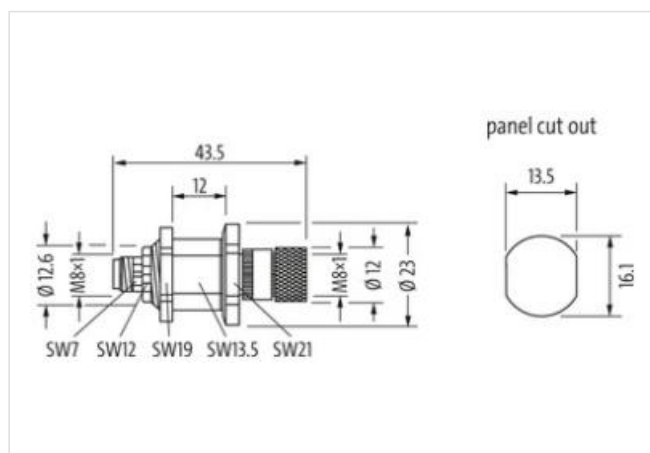
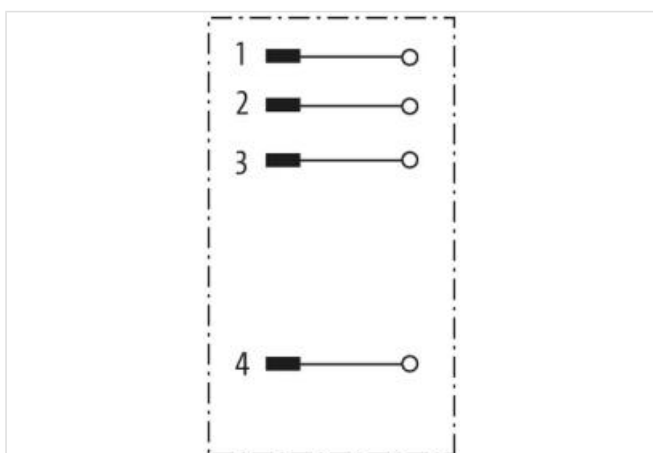
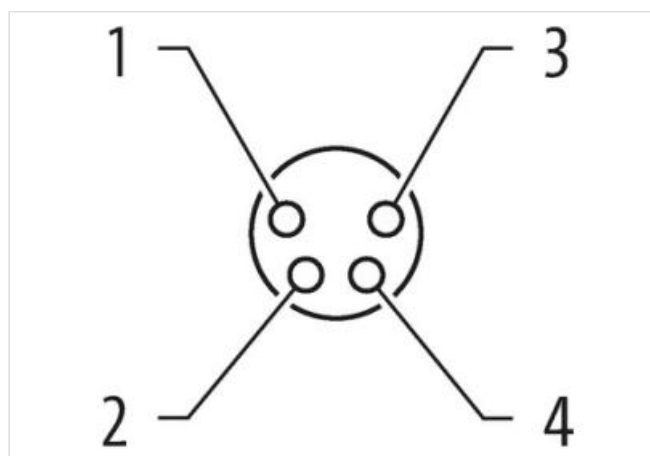
Control cabinet entry system

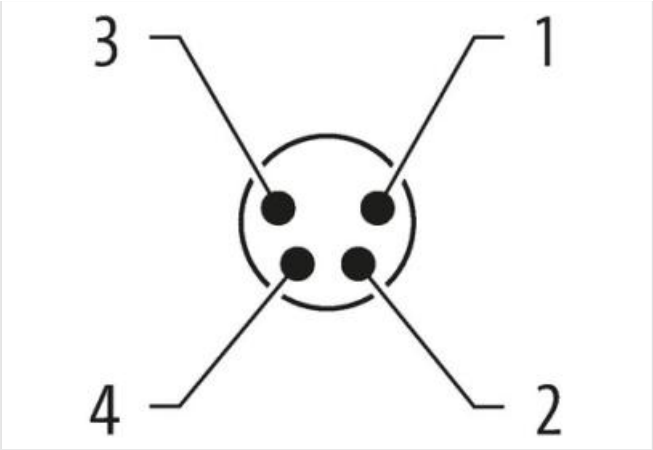
Male - female

M8, 4-pole

Rear mounting

shielded

[Link to Product](#)**Illustration**



Product may differ from Image

Side 1	
Family construction form	M8
Material contact	Copper alloy
No. of poles	4
Commercial data	
ECLASS-6.0	27143423
ECLASS-7.0	27449001
ECLASS-8.0	27449001
ECLASS-9.0	27440321
ECLASS-10.1	27440109
ECLASS-11.1	27440109
ECLASS-12.0	27440109
ETIM-5.0	EC002640
customs tariff number	85366990
GTIN	4048879689304
Packaging unit	1
Electrical data   Supply	
Operating voltage DC	60 V
Current operating per contact max.	4 A
Diagnostics	
Status indication LED	no
Installation   Connection	
Mating cycles min.	100
Device protection   Electrical	
Degree of protection (EN IEC 60529)	IP67
Additional condition protection degree	inserted, screwed
Pollution Degree	3
Rated surge voltage	1,5 kV
Overvoltage category (EN 60950-1)	II
Mechanical data	
Contour for corrugated hose	without
Mechanical data   Material data	
Coating contact	gold plated
Material housing	Metal
Material contact carrier	PA

Mounting method	inserted, screwed
-----------------	-------------------

## Environmental characteristics | Climatic

Operating temperature min. -25 °C

Operating temperature max.	85 °C
----------------------------	-------

## Important installation notes

Note on strain relief      Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.

Note on bending radius

**Attention:** Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces.